

Bormio DP610LED

LED Commercial Pendant



Specs at a Glance

Application	Commercial
Lumen Output (Power)	1500 lm (23.7W), 2000 lm (31.0W), 3000 lm (43.8W), 4000 lm (48.3W)
Color Quality	90+ CRI, 2-step SDCM (1500 lm, 2000 lm, 3000 lm). 80+ CRI, 2-step SDCM (4000 lm)
CCT Options	2700K, 3000K, 3500K, 4000K
Optics	Wide Flood (60°)
Lifetime (L70)	50,000 hrs
Input Voltage	120/277V
Dimming	Dimming down to 5% for 0-10V
Finish	Silver
Canopy	Round, Flat
Accessory	Partially Frosted Bottom Lens
Listings	ETL Listed, ENERGY STAR® qualified, California Title 24 2016 compliant
Warranty	5 years


Product Selection Guide

LUMINAIRE (Product Code Example: **DP610LED+15+27+W+R = DP610LED1527WR**)


PRODUCT CODE	LUMENS (WATTS)	CCT	OPTIC	MOUNTING	LENS
DP610LED Pendant	15 1500 lm (23.7W) 20 2000 lm (31.0W) 30 3000 lm (43.8W) 40 4000 lm (60.8W)	27 2700K 30 3000K 35 3500K 40 4000K	W Wide Flood	R Round Canopy F Flat Canopy	[Blank] None L Bottom Lens

Dimensions

Commercial Pendant LED

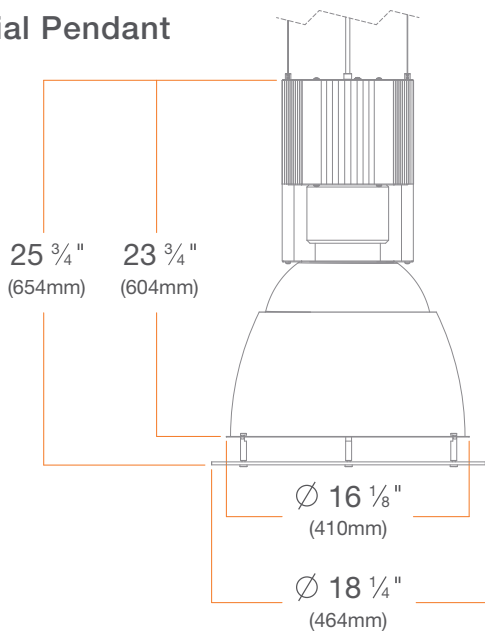

Canopy Flat

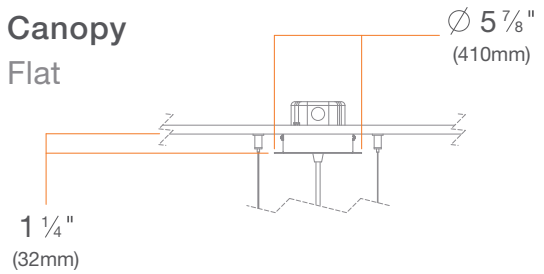

Canopy Round

